


PIN NO.	1	2	3	4	5	6	7	8
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN NO.	9	10	11	12	13	14	15	16
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

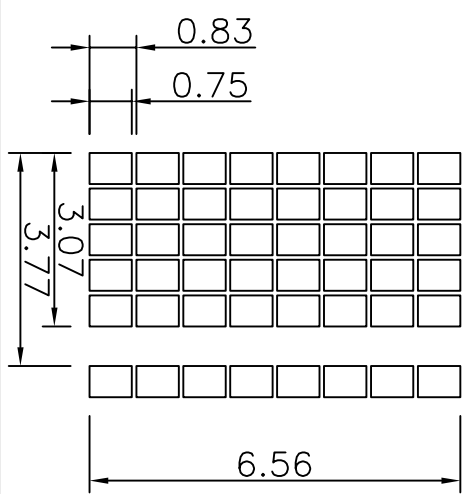

NOTES:

1. DISPLAY TYPE: TN
2. DISPLAY MODE: REFLECTIVE/POSITIVE
3. VIEWING DIRECTION: 6 O'CLOCK
4. VDD: 5.0 V
5. OPERATING TEMP: 0°C TO 50°C
6. STORAGE TEMP: -20°C TO 70°C
7. DRIVER IC: S6A0069X01-C0CX Or Equ.
8. DRIVER METHOD: 1/16 DUTY, 1/5BIAS, VOP=4.5V
9. BACK LIGHT: NONE

北京海迅华田电子有限公司

LCD	JY96009	1	BACKLIGHT	SB084A-01	—		
PCB	HP047A	1	ZEBRA	---	2		
BEZEL	TK-043(CLIP)	1	DRIVER	S6A0069X01-C0CX	1		
SYMBOL	ITEM OR CODE NO.	QTY	REMARK	SYMBOL	ITEM OR CODE NO.	QTY	REMARK
TOLERANCE							
>0~6	±0.10						
>6~80	±0.20						
>80~240	±0.30	DESIGN					
>240~400	±0.50	CHECKED	STANDARD				
// 1.0 ±0.10		APPROVED	TECHNOLOGY	QA			
DRAWING No.: HC160101C-TR60N-VA		DRAWING TITLE: LCD MODULE					
REV.: A		SCALE: -		PROJECTION:			
UNIT: mm		SHEET: 1/1					