


REV.	CHANGE CONTENT	BY	DATE

Pins Description

Pin No.	Symbol	Description
1	VDD	Power Supply Pin : +5.0V
2	VSS	Ground
3	V0	LCD Operation Voltage
4-11	DO-D7	Data Bus
12	/CS1	Chip1 enable signal, active"L"
13	/CS2	Chip2 enable signal, active"L"
14	/RST	Reset: L: Enable; H: Disable
15	/WR	H: read, L: Write
16	C/D	L: Data; H: Instruction
17	E	Enable signal
18	VOUT	-
19	K	LED-
20	A	LED+

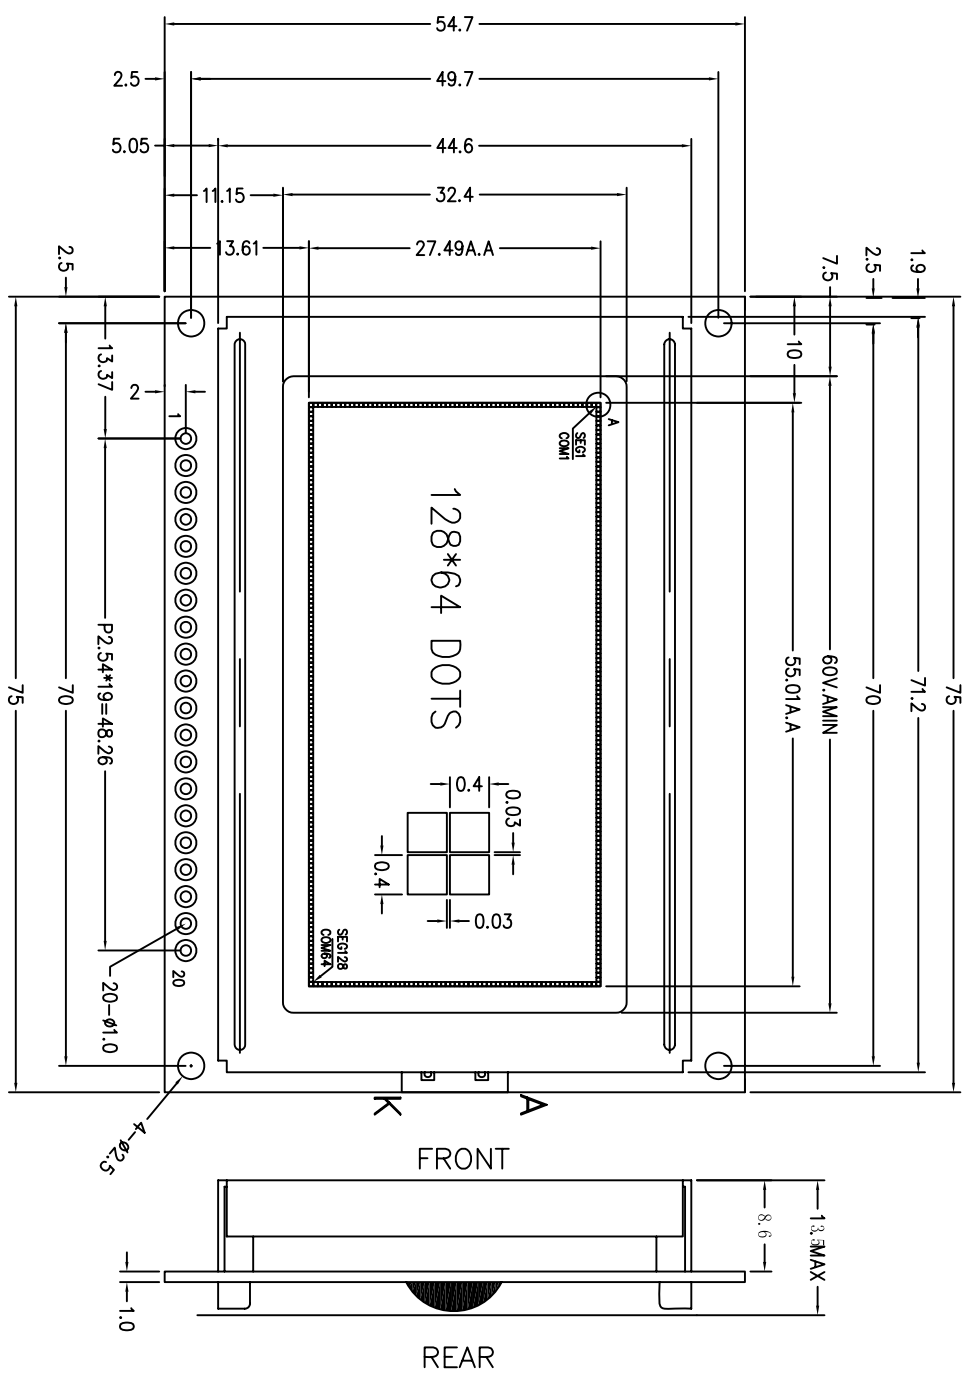

NOTE:

1. DISPLAY TYPE: STN-POSITIVE-TRANSFLECTIVE-Y/G
2. VIEWING DIR.: 6:00
3. DRIVE METHOD: 1/64DUTY, 1/9BIAS, Vop=10.5V,VDD=5.0V
4. OP. TEMP.: -20C~70C
5. ST. TEMP.: -30C~80C
6. WITH HIGH TRANSMISSIVE AND HIGH REFLECTIVE POL
7. ANTI-UV FILTER
8. CONTROLLER: S6B0107
9. BACKLIGHT: LED COLOR-Y/G, 接口电压5.0±0.2V, If=120mA,

TOLERANCE	>0~6 ±0.10		<b>HTDISPLAY CO., LTD.</b>	DRAWING No. : HG1286418C-Y/G2L-VA		
	>6~80 ±0.20			DRAWING TITLE: LCM DRAWING		
	>80~240 ±0.30	DESIGN	LZM	06.4.23	REV. : A	SCALE : -
	>240~400 ±0.50	CHECKED		TECHNOLOGY	PROJECTION:	UNIT : mm
	/// 1.0 @ ±0.10	APPROVED		Q.A		SHEET : 1/1